




# GaN-based UV photodiode

Model GS-ABC-3535LI

## General Features:

- UVA+UVB+UVC photodiode
- Photovoltaic mode operation
- SMD 3535 ceramic inorganic package
- Good visible blindness
- High responsivity and low dark current

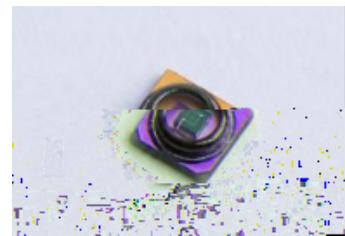


**Applications:** air purification, water quality measurement


## Specifications:

Parameters	Symbol	Value	Unit
<b>Maximum ratings</b>			
Operation temperature range	T <sub>opt</sub>	-25-85	°C
Storage temperature range	T <sub>sto</sub>	-40-85	°C
Soldering temperature (3 s)	T <sub>sol</sub>	260	°C
Reverse voltage	V <sub>r-max</sub>	-10	V
<b>General characteristics (25 °C)</b>			
Chip size	A	1	mm <sup>2</sup>
Dark current (V <sub>r</sub> = -1 V)	I <sub>d</sub>	<1	nA
Temperature coefficient (@265 nm)	T <sub>c</sub>	0.05	%/°C
Capacitance (at 0 V and 1 MHz)	C <sub>p</sub>	18	pF
<b>Spectral response characteristics (25 °C)</b>			
Wavelength of peak responsivity	λ <sub>peak</sub>	355	nm
Peak responsivity (at 355 nm)	R <sub>max</sub>	0.20	A/W
Spectral response range (R=0.1×R <sub>max</sub> )	-	210-370	nm
UV-visible rejection ratio (R <sub>max</sub> /R <sub>400 nm</sub> )	-	>10 <sup>4</sup>	-

## Spectral response

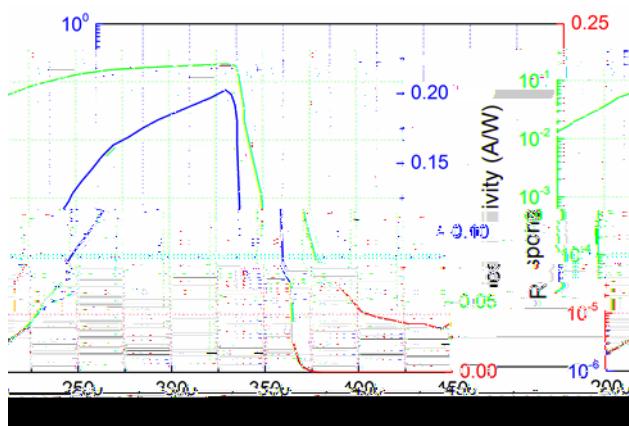

## Package dimensions

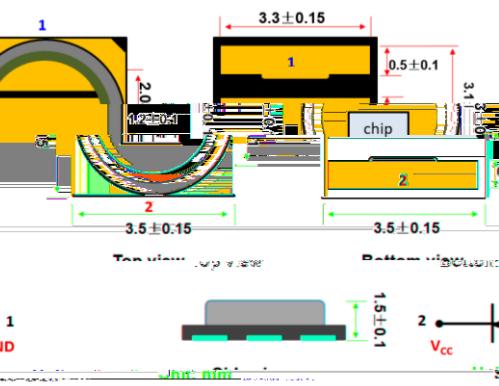

**GaN-based UV photodiode**

**Model GS-ABC**